



casset shelf instruction manual

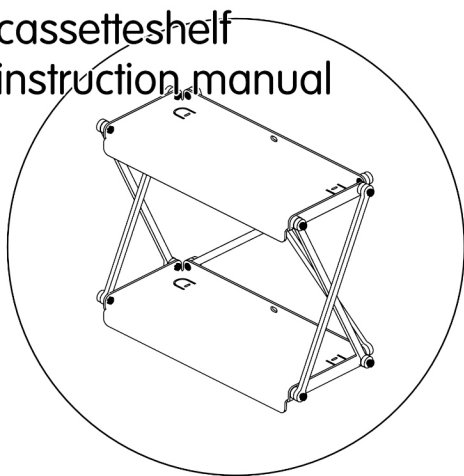


① assemble left side

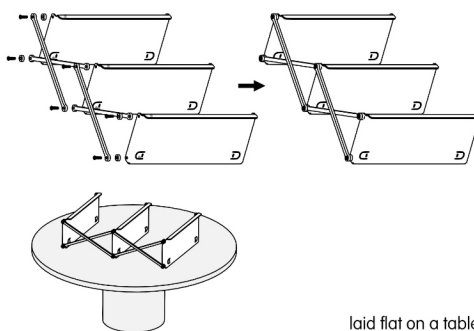


laid flat on a table,
assemble the left side of the entire shelf.
make sure to have a double thickness every time.
(either two rods stacked or one rod + one washer)
lightly tighten the bolts to keep stable but still a bit loose.

② add columns

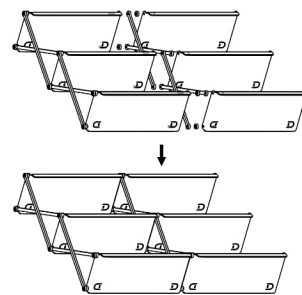


still laid flat on a table,
sequentially add COLUMNS to the assembly
by first inserting the screws towards the right,
then putting the rods and washers.
MAKE SURE RODS AND WASHERS FOLLOW SAME PATTERN.
add the plates and lightly tighten the nuts.

!!! warning

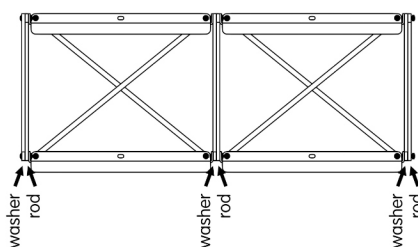


for aesthetic and expandability purposes,
make sure that the rods and washer follow the same
pattern throughout the entire assembly.

③ add final rods

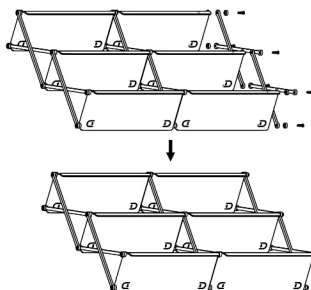


for the final rods and washers capping the
last column, make sure to keep the same washer/rod pattern
and to insert the screws from the right to the left
as to make the head of the screw face outwards.

④ assemble back rods

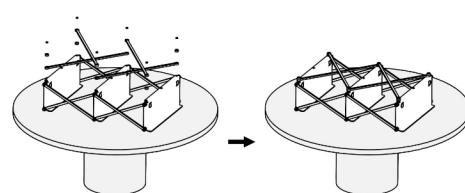


put the assembly face down on a flat surface.
assemble the long rods in a criss-cross pattern,
once again using the same rod and washer pattern throughout.
make sure that the head of the screws are on the inside
of the assembly

⑤ tighten loose screws

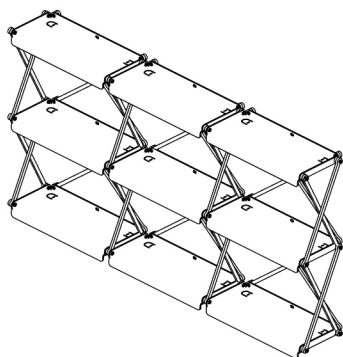


now that the shelf is assembled, tighten all loose screws

Ⓐ floor setup

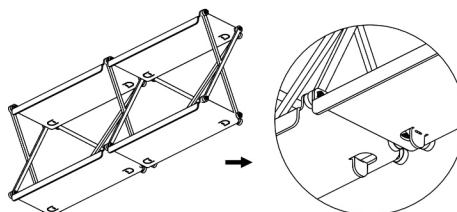


to put the shelf on the floor,
bend downwards all the feet of the bottom plates
using a hard edge to help.

Ⓑ1 wall setup, pt.1

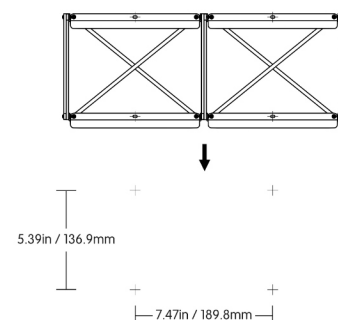


to put the shelf on the wall,
trace points on the wall following these dimensions.
one point is required per plate.
make sure the grid is level.

Ⓑ2 wall setup, pt.2

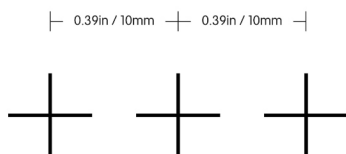


once all the center points are drawn on the wall,
add points on both sides of each point
(following these dimensions)
drill these points to accomodate #8 sized screws
(wall plugs recommended)

Ⓑ3 wall setup, pt.3

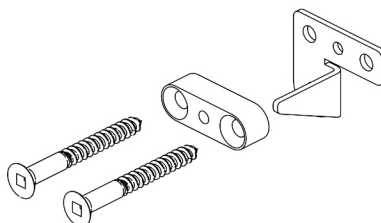

after the holes are drilled into the wall,
drill the #8 screws through the plastic adapter
and through the aluminum wall bracket
into the pre-drilled wall holes
Repeat for each anchor point.

Ⓑ4 wall setup, pt.4

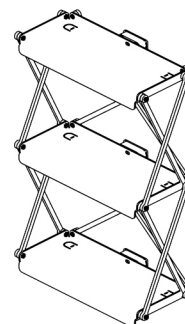

once all the brackets are mounted on the wall,
screw the shelf to the wall using the provided black screws.
make sure to screw the entire shelf loosely,
then tighten everything at the end.